

DPA™ DRY PENETRATING AGENT



Certified to
NSF/ANSI/CAN 60

DESCRIPTION

DPA cleans casing, screens, gravel packs, and water-bearing formations of deposits consisting of mineral scale. Calcium carbonate, iron, and manganese are the most common. DPA is a granular product and is certified to NSF/ANSI/CAN Standard 60, Drinking Water Treatment Chemicals - Health Effects.

RECOMMENDED USE


DPA is a safe-to-handle, dry penetrating agent that produces a strong acid to dissolve carbonates and hydroxides of calcium, iron, and manganese on the well casing, screen, gravel pack, and pumps.

CHARACTERISTICS

DPA in dry form will not emit fumes and will not irritate the skin. It is safer to handle than hydrochloric or muriatic acid. Upon dissolution in water, DPA penetrates mineral encrustations, converting them to soluble salts, which are easily pumped to waste. DPA is much less corrosive on well materials (screen, pumps) than traditional chemicals such as hydrochloric acid.

MIXING AND APPLICATION

1. Test well pH before starting treatment. Disconnect pumping system.
2. Calculate quantity of DPA required according to the Dosage Table. Normal dosage is 0.25 lb per gallon. Dosage for severe encrustation is 0.5 lb per gallon. If gravel pack is present, the volume of water in it should be accounted for as part of the total well volume (typical porosity of gravel pack is 30-40%).
3. Dissolve DPA in water and add to the well. Agitate the well for 12-48 hours by surging, jetting, or circulating the water. Treatment time will vary depending on well construction and severity of encrustation.
4. After required contact time, well should be purged until there are no traces of discoloring or particulate matter from mineral deposits in the purge water.
5. Once the purge water is visually free of color or particulate matter, an additional five well volumes should be removed from the well. Water should be free of acid to within 0.5 units of original pH.
6. If the purge water is acidic, it should be neutralized prior to discharge.

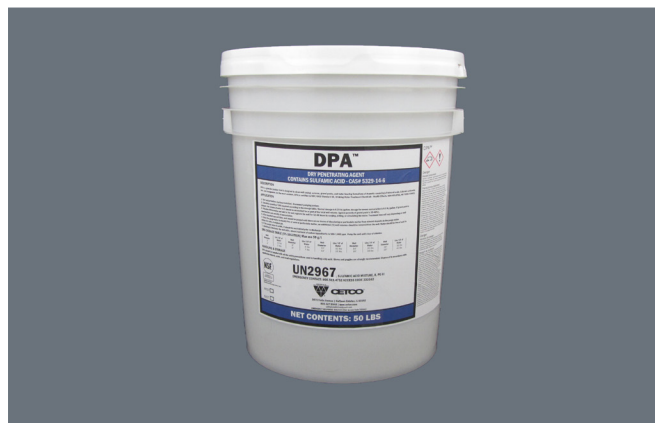

7. (Optional) Chlorinate the well with a shock treatment of sodium hypochlorite to 500-1,000 ppm. Pump the well until clear of chlorine.

DPA DOSAGE TABLE (0.25 lb per gallon)

Well Diameter	Lbs/10 ft of Water
2"	0.41 lb
4"	1.64 lbs
6"	3.69 lbs
8"	6.56 lbs
10"	10.25 lbs
12"	14.76 lbs
14"	20.09 lbs
16"	26.23 lbs
18"	33.20 lbs
20"	40.99 lbs

*For severe encrustations, double the amount of DPA shown above.

PACKAGING

~50 lb (~22.68 kg) pail, 48 per pallet or ~476 lb (~214 kg) drum, 4 per pallet. All pallets are plastic-wrapped.

North America: 847.851.1800 | 800.527.9948 | www.CETCO.com

UPDATED: OCTOBER 2021

© 2021 CETCO. IMPORTANT: The information contained herein supersedes all previous printed versions, and is believed to be accurate and reliable. For the most up-to-date information, please visit www.CETCO.com. CETCO accepts no responsibility for the results obtained through application of this product. All products are sold on the understanding that the user is solely responsible for determining their suitability for the intended use and for proper use and disposal of the product. CETCO MAKES NO WARRANTY OF MERCHANTABILITY OR SUITABILITY FOR ANY PARTICULAR PURPOSE IN CONNECTION WITH ANY SALE OF THE PRODUCTS DESCRIBED HEREIN. CETCO reserves the right to update information without notice.

FORM: TDS_DPA_AM_EN_202110



CETCO®